


Product data sheet
3RN1010-2CM00


 THERMISTOR MOTOR PROTECTION STANDARD
 EVALUATION UNIT AUTO,
 1NO+1NC, AC 230V CAGE CLAMP CONNECTION

General technical details:

Type of voltage	AC
Supply voltage frequency	
<ul style="list-style-type: none"> • 1 / for auxiliary and control current circuit <ul style="list-style-type: none"> • rated value 	50 Hz
<ul style="list-style-type: none"> • 2 / for auxiliary and control current circuit <ul style="list-style-type: none"> • rated value 	60 Hz
Control supply voltage	
<ul style="list-style-type: none"> • 1 <ul style="list-style-type: none"> • at 50 Hz / for AC <ul style="list-style-type: none"> • rated value 	230 V
<ul style="list-style-type: none"> • at 60 Hz / for AC <ul style="list-style-type: none"> • rated value 	230 V
Number of measuring circuits	1
Number of NC contacts / for auxiliary contact	1
Number of NO contacts / for auxiliary contact	1
Number of change-over switches / for auxiliary contact	0
Measurable temperature	
<ul style="list-style-type: none"> • initial value 	60 °C
<ul style="list-style-type: none"> • final value 	180 °C
Product function	
<ul style="list-style-type: none"> • Reclosing interlock 	No
<ul style="list-style-type: none"> • Self-reset 	Yes
<ul style="list-style-type: none"> • Defect storage 	No
<ul style="list-style-type: none"> • Reset external 	No

Mechanical design:

Design of the electrical connection / for auxiliary and control current circuit	spring-loaded terminals
Design of the electrical connection / Jumper socket	No
Type of display / LED	Yes
Width	22.5 mm
Height	94 mm
Depth	91 mm

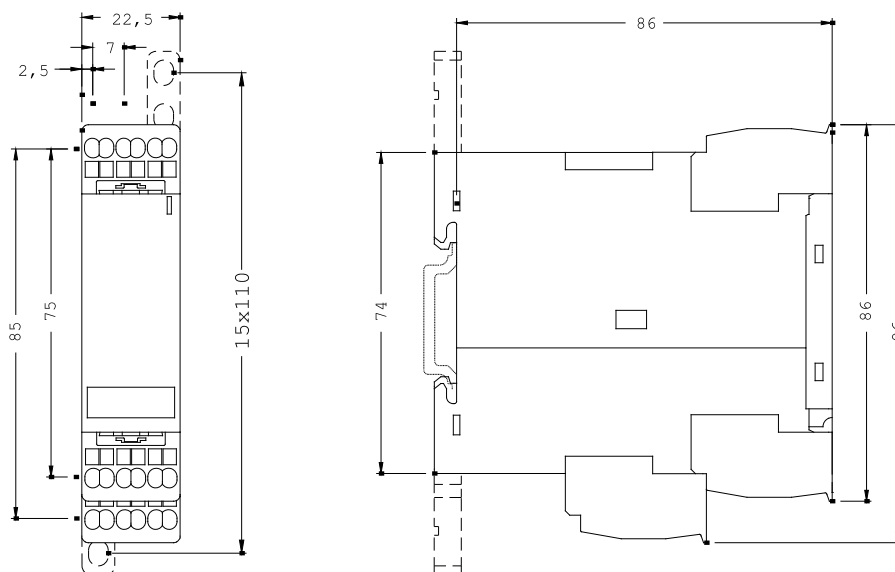

last change:

10/31/2006

Technical Assistance:

Telephone: +49 (0) 911-895-5900 (8°° - 17°° CET)

Fax: +49 (0) 911-895-5907

E-Mail: technical-assistance@siemens.comInternet: www.siemens.de/lowvoltage/technical-assistance